

## FILTRO "Y" HIERRO FUNDIDO A ROSCA BSPT (a Pedido NPT)


### Materiales

DIAMETRO	CUERPO	CANASTO STD	BUJE TAPA	JUNTA	ESPARRAGOS
1/2" - 3/4" - 1"	ASTM A 126 B	MALLA 30/30 AISI 304	HIERRO MALEABLE	TEFLON	N/P
1.1/4"-1.1/2"-2"					
2.1/2"-3"-4"		MALLA 16/60 AISI 304	ASTM A 126 B	LIBRE DE AMIANTO	ASTM A 193 Gr. B7 ASTM A 194 Gr. 2H


### Datos Físicos

DIA.	DIMENSIONES			PRESION MAXIMA	
	A (mm)	B (mm)	C (Pulg.)	DE VAPOR SATURADO Kg/cm2	A 65°C Kg/cm2
1/2"	98	70	1/2"	17,5	28
3/4"	111	70	1/2"	17,5	28
1"	111	70	1/2"	17,5	28
1.1/4"	134	90	1/2"	17,5	28
1.1/2"	148	98	1/2"	17,5	28
2"	175	120	1/2"	17,5	28
2.1/2"	195	135	3/4"	17,5	28
3"	230	165	3/4"	17,5	28
4"	285	205	1"	17,5	28

Corte Filtro "Y" 1/2" - 2"

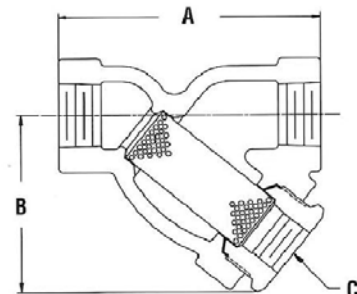

### Rango de Presión y Temperatura (Bar - ° C)

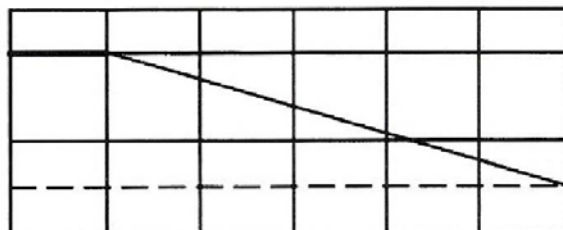

28 Bar

21 Bar

17 Bar

14 Bar

38° 65° 90° 120° 150° 175° 200°

Corte Filtro "Y" 2.1/2" - 4"

