

## FILTRO "Y" HIERRO FUNDIDO A BRIDA ASA150


### Materiales

DIAMETRO	CUERPO	CANASTO STD.	BUJE TAPA	JUNTA	ESPARRAGOS
1/2" - 1.1/2"	ASTM A 126 B MALLA 16/10 CHAPA PERF. 3 mm	MALLA 30/30 AISI 304	H° MALEABLE	TEFLON	N/P.
2"		—	ASTM A 126 B	LIBRE DE AMIANTO	ASTM A 193 Gr.B7 ASTM A 194 Gr. 2H
2.1/2" - 4"		—			
5" - 12"		—			

### Datos Físicos

DIAM. PULG.	DIMENSIONES			PRESION MAX.	
	A mm	B mm	C mm	VAPOR SATURADO Bar	A 65 ° Bar
1/2"	161	75	1/2"	17,5	28
3/4"	161	75	1/2"	17,5	28
1"	187	102	1/2"	17,5	28
1.1/4"	226	115	1/2"	17,5	28
1.1/2"	230	115	1/2"	17,5	28
2"	255	150	1/2"	17,5	28
2.1/2"	302	155	3/4"	17,5	28
3"	354	205	3/4"	17,5	28
4"	420	270	1"	17,5	28
5"	530	320	1.1/4"	17,5	28
6"	565	370	1.1/2"	17,5	28
8"	561	325	2"	17,5	28
10"	635	450	2"	9	12,2
12"	815	540	2"	9	12,2

### Corte Filtro "Y" 1/2" a 1.1/2"

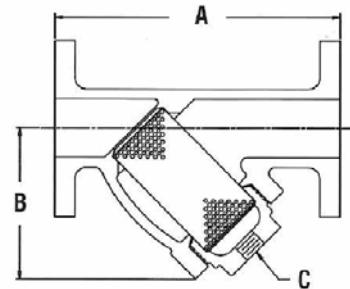

### Corte Filtro "Y" 2 a 12"

